


Naziv PDF datoteke

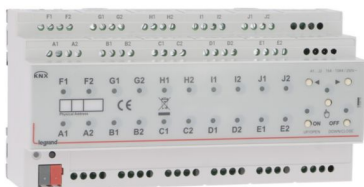

LEGRAND

KNX controller multi-applications din 20 outputs

REF. 002678 | EAN KODA. 3414972052368

> [The product details page](#)

Značilnosti izdelka:

- 20 outputs - 16A - 250 VAC 50/60 Hz - 4000 VA max
- DIN 10 modules
- Power supply from KNX bus (= 10mA)

Priporočila / omejitve

- Configuration through ETS tool from KNX association

Prednosti montaže:

- Connected with the BUS/KNX cable

Prednosti uporabe:

- All in one product for different room layouts such as apartments, hotel rooms, hospitals and residences: switching lighting, switching loads, controlling AC/DC blinds, controlling fan coils (2 & 3 point valve)

Edinstvene značilnosti:

- Grouped 4 outputs as 5 independent output channels configurable for different modes of operation: switching output x4, AC blind x2, DC blind x1, 2 Point valve x2, 3 point valve x1
- Suitable for switching resistive, capacitive and inductive loads as well as fluorescent lamp following several functions: staircase, external logic, internal logic, priority, threshold, operating hour, sweep

Dokumentacija

Tehnična dokumentacija

-  S000114123EN_4.pdf | PDF (4.97Mo)
-  LE12358AD.pdf | PDF (0.62Mo)
-  S000114123FR_4.pdf | PDF (4.85Mo)

Pogodbe in certifikati

-  KNX EIB-11/16831/20 | (0.79Mo)

Katalog & drugo

-  ex223001_0896.pdf | PDF (0.07Mo)

Oznaka besedila

-  USE CASE_ L.NOW Thermo. 2P ON_OFF.zip | ZIP (1.61Mo)
-  USE CASE_ L.NOW Thermo. 2P ON_OFF 3pts.zip | ZIP (1.71Mo)
-  USE CASE_ L.NOW Thermo. 4P ON_OFF 3pts.zip | ZIP

(1.91Mo)

 USE_CASE_ Malia _Thermo. 2P_ON_OFF_3pts.zip | ZIP
(1.95Mo)

 LOG_RA00204AA_002678-V01.01.zip | ZIP (0.29Mo)

 USE CASE_ L.NOW Thermo. 4P ON_OFF.zip | ZIP (1.86Mo)